REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	3/4/2013	

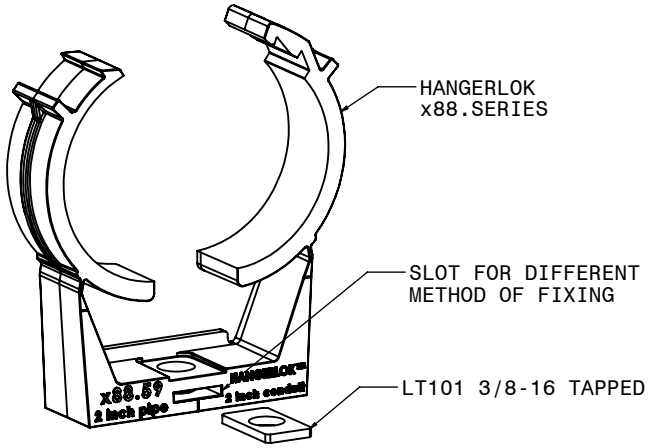

1. INSERT LT101 3/8-16 TAPPED TO HANGERLOK SLOT

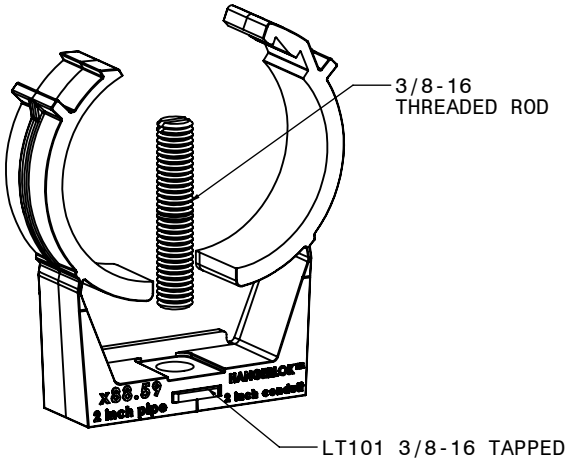

2. INSERT 3/8-16 THREADED ROD TO THE 3/8-16 FLUSH ANCHOR.

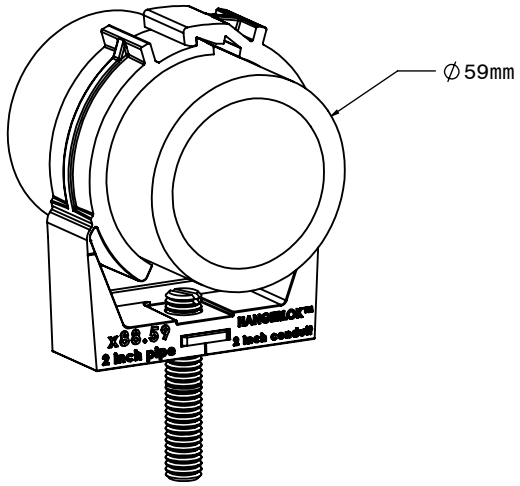

3. LOCK THE HANGERLOK FOR SECURING THE PIPE

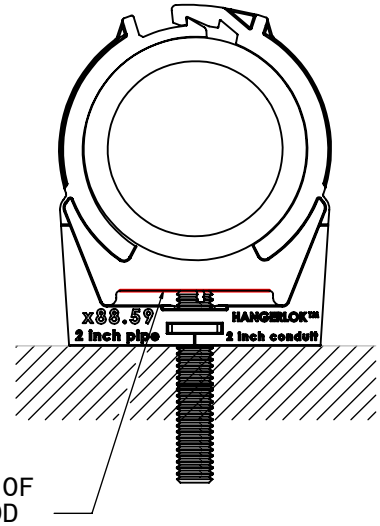

Note:
MAX HEIGHT OF THREADED ROD

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LITCHFIELD INTERNATIONAL INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LITCHFIELD INTERNATIONAL INC. IS PROHIBITED.

NEXT ASSY	USED ON	
APPLICATION		

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	PDT	
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

COMMENTS:

Litchfield International Inc.

INSTALLATION WITH LT101 3/8-16 TAPPED, 3/8-16 THREADED ROD AND FLUSH ANCHOR

SIZE	DWG. NO.	REV.
A	X88.59	
SCALE:1:2	WEIGHT:	SHEET 1 OF 1