


HangerLoK[®] Product Guide #2

one level up

From the people who brought you the first thermoplastic support and hanger in 1984

Hangerlok Applications

Pipe and Tubing
PVC, CPVC, Pex Tubing,
Stainless Steel Tubing,
Copper Tubing,
Electrical Conduit,
PVC, ENMT, EMT, IMC,
Wire and Cable,
Radiax, Power Cable, RF,
Low Voltage,
Structured Cable,
and more!

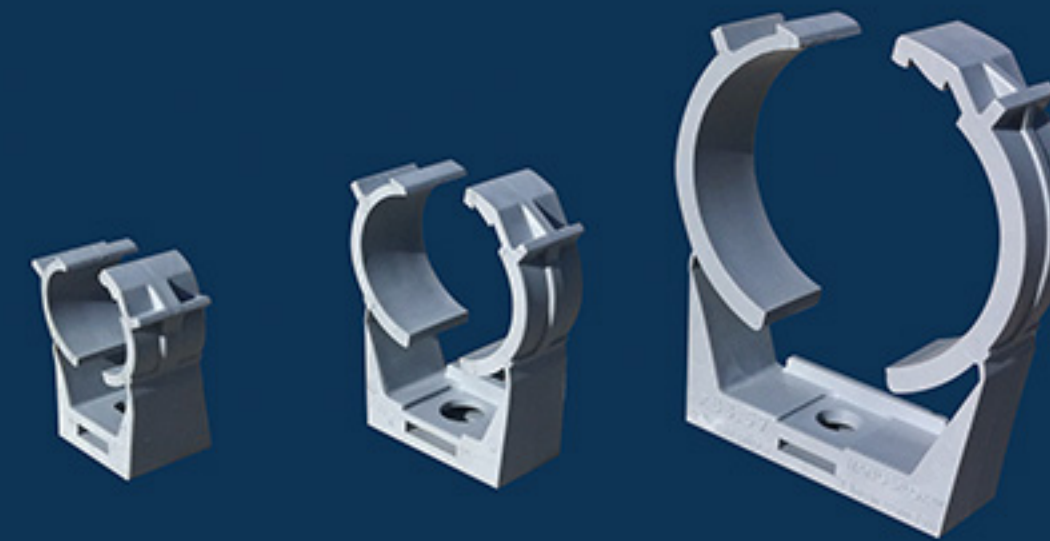

Contact Information

Litchfield International Inc
457 Bantam Road #12
Litchfield CT 06759

Complete product information available:
www.hangerlok.com
Technical drawings, fasteners, product range,
3D models and YouTube HangerLoK movies

**Be sure to read UL Standard 2239
Application for Hangerlok**

Customer Service: 888.443.3999
Inquiries: info@hangerlok.com
See installation movies on YouTube:
youtube.com/hangerlok

Proudly Made In The

USA

Hangerloks, flanges,

screws, fasteners,

struts, and more!

PRODUCTS



#113

#80



#59

#32

#20


Contact Information

Litchfield International Inc
457 Bantam Road #12
Litchfield CT 06759

Complete product information available:
www.hangerlok.com
Technical drawings, fasteners, product range,
3D models and YouTube HangerLoK movies

Customer Service: 888.443.3999
Inquiries: info@hangerlok.com
See installation movies on YouTube:
youtube.com/hangerlok

SPACERS

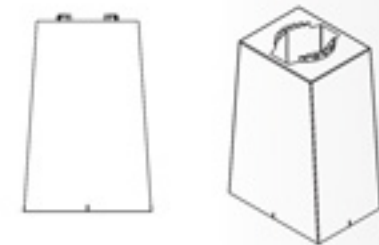

Hangerlok #59
with 85mm Spacer
(45mm and 85mm available)

FLANGES



Stainless Steel Design

For use with pipe, tubing [copper, stainless steel, pex] Electrical conduit, cable types, radiax



LT 101 Flange (SS 304)
Tapped 1/4 inch for use with threaded rod
Use with Hangerlok:
#15,17,17,20,22,25



LT 101-1/4 - Flange (SS 304)
Tapped 1/4 inch for connection with threaded rod
Use with Hangerlok:
#28,32,36,40,47,51,59




LT 101-3/8 - Flange
Tapped 3/8 inch for connection with 3/8 inch rod
Use with Hangerlok:
#28,32,36,40,47,51,59



LT 106 - Flange (SS 304)
Tapped 3/8 inch for connection with threaded rod
Use with Hangerlok:
#71,80,113 = 2.5 - 4" diameters

STRUTS

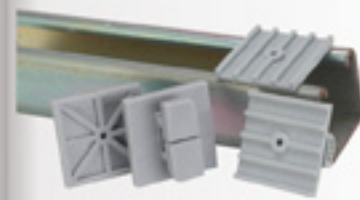

LT 109
Use with all sizes of Hangerlok
3/8 - 4 inch diameters



LT 109-2
Use with Hangerlok sizes:
#12,17,20,22,25
Light duty

SCREWS



LT: 12-25
General Purpose
For Use With:
12,15,17,20,22,25

#8 x 1-1/4 Phillip Wafer Head
Fine Thread Sharp Point
Heat Treated & Zinc Chromate Plated

Made in Taiwan
Carton Quantity: 100 pieces



NEW Custom Screw (2 types)
For Use With:
28,32,36,40,47,51,59

#12 x 1-1/4 Modified Pan Washer HD #2 Sq Dr
Type A - Lok USA
Heat Treated & CRAFTCOAT *1000 Plated
Plated 1000 for corrosion resistance
Zinc Plated for general purpose
Made in USA
Carton Quantity: 50 pieces

Easy Installation



Hangerlok® Benefit Sheet

1. Material Nylon 6/6 V0 rating. Most durable and corrosion resistant polymer in the category.
2. UV treated for exposed locations.
3. Plenum rated via the rigorous standard UL2239.
4. Corrosion Resistant
5. Locking jaws redesigned for tighter engagement around the pipe or tubing.
6. Product allows expansion and contraction of the piping and conduit systems.
7. Strutcatcher allows prefabrication of the trapeze hanger setup, reducing labor units by 50%.
8. Accessories are 304 stainless steel for superior tensile strength and corrosion resistance.
9. Made in USA with domestic resins and steel. Diameter Sizing 3/8 - 4 inch diameter.
10. More versatile than other hangers in the category with use of accessories.
11. Mounting options make Hangerlok more Americanized and less European.
12. Reduces valuable labor units in installation.

Additional features:

- Will not particulate
- Will not support bacteria
- Safety factor 10 - 1
- Material data sheets on website
- Low off gassing
- Halogen and phosphate free

